CONTINUOUS CURBING | MEGA MARKER[™]



ACCEPTS UP TO 224 SQ. IN. OF REFLECTIVE SHEETING

The QWICK KURB[®] Continuous Curbing System with MEGA MARKER[™] Panels is a MASH Longitudinal Channelizing System ideal for harsh environments such as narrow medians and work zones. Large formidable delineators on top of a raised continuous curb clearly define the intended travel path and increase motorist compliance while providing superior channelization in all weather conditions, even snow.

MEGA MARKER™ L104 PANEL

The elliptical shape of the QWICK KURB MEGA MARKER Panel can accept up to 224 square inches of reflective sheeting per side to achieve the highest level of night visibility. The MEGA MARKER Panel connects to the curb base using the unique QWICK KURB two-part vertical rebounding flex boot support. This allows for installation of extra large 42 in. markers that can spring back to an upright position after an impact.

CONTINUOUS CURBING


QWICK KURB Continuous Curbing is designed to interlock together similar to concrete barrier wall. In addition, a heavy duty hook is molded directly into the element to strengthen the system laterally. Anchors can also be added for long-term installations. The two-tier profile is designed to keep curbing stationary during run overs. The QWICK KURB Continuous Curbing can be installed in curves as tight as 38 feet in diameter.

The QWICK KURB Continuous Curbing System with MEGA MARKER Panels meets eligibility requirements based on AASHTO MASH criteria as a TL-3 Longitudinal Channelizer. The system can be installed fully anchored, semi-anchored or in some work zone applications, unanchored.

MASH PRODUCTS



CONTINUOUS CURBING W/Panel_Marker

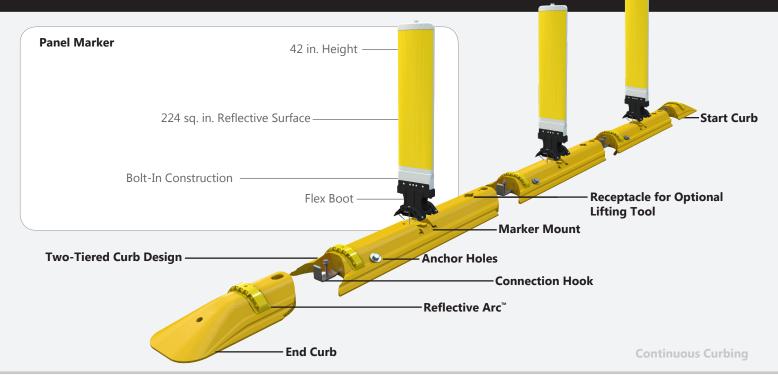

Continuous Curbing

Curb Height 3 1/2 in. (89 mm)

Start Curb Length (PT# L62) 18 in. (457 mm)

Curb Length (PT# L60) 40 in. (1016 mm)

End Curb Length (PT# L61) 18 in. (457 mm)

Max. Installed Curve Radius 38 ft. (11.6 m)

Available Colors Yellow, White

MEGA MARKER[™]

Combined Marker & Curb Height 45 1/2 in. (1156 mm)

Width 8 5/8 in. (219 mm)

Depth 2 3/4 in. (70 mm)

Overall Shape Eliptical

Reflective Sheeting Surface **224 sq. in.**

Part Number L104

Performance

MASH / NCHRP 350 Category Category III Anchored Performance TL-3 Semi-Anchored Performance TL-3

Unanchored Performance **TL-3**

QWICK KURB®, Inc. 1916 US 41 South • Ruskin, FL 33570 • (813) 645-5072 www.gwickkurb.com

General details for QWICK KURB Systems are subject to change without notice to reflect improvements and upgrades. Always refer to the installation manual for details and cautions. Additional information is available from QWICK KURB, INC. © QWICK KURB, INC. Jace Chandler & Associates, Inc. 2906 Crescent Avenue Homewood, Alabama 35209 Ph: (205) 879-7336 Email: jchandler@jcasouth.com

